

A CAR-BORNE SAR SYSTEM FOR INTERFEROMETRIC MEASUREMENTS: DEVELOPMENT STATUS AND SYSTEM ENHANCEMENTS

Othmar Frey
Gamma Remote Sensing /
Earth Observation & Remote Sensing,
ETH Zurich, Switzerland
Email: frey@gamma-rs.ch / ofrey@ethz.ch

Charles L. Werner
Gamma Remote Sensing
Switzerland
Email: cw@gamma-rs.ch

Irena Hajnsek, Roberto Coscione
Earth Observation & Remote Sensing,
ETH Zurich Switzerland
Email: {hajnsek, coscione}@ifu.baug.ethz.ch

Abstract—Terrestrial radar systems are used operationally for area-wide measurement and monitoring of surface displacements on steep slopes, as prevalent in mountainous areas or also in open pit mines. One limitation of these terrestrial systems is the decreasing cross-range resolution with increasing distance of observation due to the limited antenna size of the real aperture radar or the limited synthetic aperture of the quasi-stationary SAR systems. Recently, we have conducted a first experiment using a car-borne SAR system at Ku-band, demonstrating the time-domain back-projection (TDBP) focusing capability for the FMCW case and single-pass interferometric capability of our experimental Ku-band car-borne SAR system. The cross-range spatial resolution provided by such a car-based SAR system is potentially independent from the distance of observation, given that an adequate sensor trajectory can be built. In this paper, we give (1) an overview of the updated system hardware (radar setup and high-precision combined INS/GNSS positioning and attitude determination), and (2) present SAR imagery obtained with the updated prototype Ku-band car-borne SAR system.

Index Terms—Synthetic aperture radar (SAR), ground-based SAR system, SAR imaging, SAR interferometry, car-borne SAR, CARSAR, GPU, CUDA, parallelization, azimuth focusing, interferometry, Ku-band

I. INTRODUCTION

Today, terrestrial radar systems are used operationally for area-wide measurement and monitoring of surface displacements [1], [2] on steep slopes, as prevalent in mountainous areas or also in open pit mines. Terrestrial radar systems are complementary to high-precision point-wise measurements, as obtained with total station theodolites, and also to photogrammetry or laser scanning that typically provide larger coverage but are less sensitive to detect small surface displacements. In addition, terrestrial radar systems are also complementary to spaceborne SAR interferometry based displacement measurements in terms of the viewing geometry and the temporal sampling of the deformation signal.

One limitation of these terrestrial systems is the decreasing cross-range resolution with increasing distance of observation due to the limited antenna size of the real aperture radar or the limited synthetic aperture of the quasi-stationary SAR systems. Recently, we have conducted a first experiment using a car-borne SAR system at Ku-band, presented in [3], demonstrating the time-domain back-projection (TDBP) focusing capability for the frequency-modulated continuous-wave (FMCW)-case and single-pass interferometric capability of our experimental Ku-band car-borne SAR system (see Table I). Most importantly—and in contrast to the deteriorating cross-range resolution of the stationary ground-based systems—the spatial resolution provided by such a car-based SAR system is potentially independent from the distance of observation, given that an adequate sensor trajectory can be built.

Meanwhile, the car-borne measurement setup has been enhanced with a high-precision positioning and attitude determination system, a combined inertial navigation system (INS) and Global Positioning Satellite System (GNSS) system (see Fig. 1). The specifications of the INS/GNSS system are given in Table II. While stationary systems are bound to relatively high frequencies (many of them operate at Ku-band around 17.2GHz) to ensure an acceptable cross-range resolution, the proposed car-borne system will eventually operate at a lower frequency (L-band) while still achieving a much better cross-range resolution (order of a few decimeters), than stationary terrestrial radar/SAR systems.

In this paper, we give (1) an overview of the updated system hardware (radar, and high-precision combined INS/GNSS positioning and attitude determination), and (2) present SAR imagery obtained with the updated Ku-band car-borne SAR system.

II. MEASUREMENT SETUP

Table I contains the specifications of the car-borne FMCW radar prototype system at Ku-band. The current

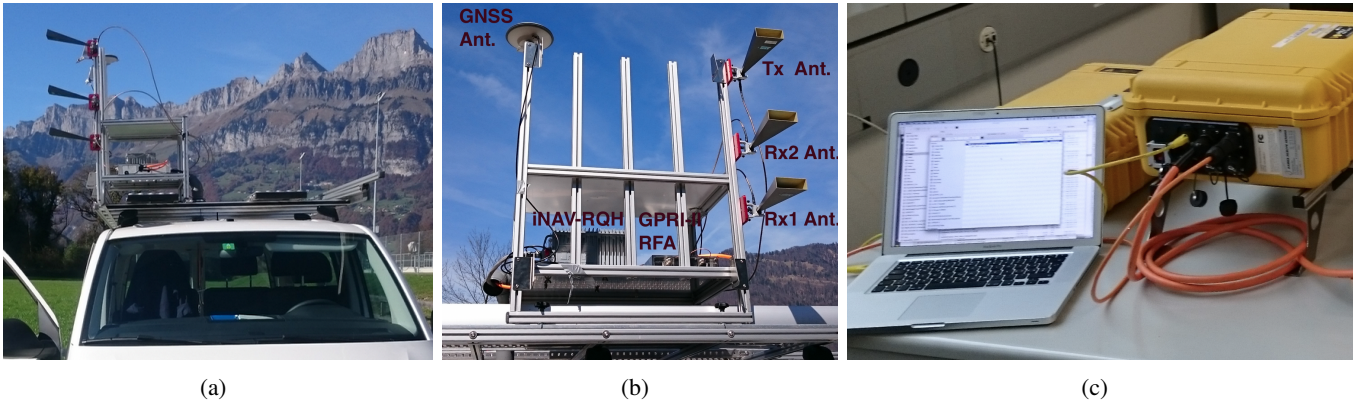


Fig. 1. a) Front view of the antenna rack with mounted Ku-band horn antennas. b) Sideview of rack hosting one transmit antenna and two receive antennas, the RFA unit of the Ku-band radar, the INS/GNSS iNAV-RQH system with GNSS antenna for high-precision positioning/attitude determination. c) External computer and Instrument Controller Case containing the instrument computer, power supplies, and Software Defined Radio (SDR).

TABLE I
KU-BAND CAR-BORNE SAR SPECIFICATIONS

Carrier frequency	17.2 GHz
Chirp bandwidth	50 - 200 MHz
Type	FMCW
Chirp lengths	250 μ s - 8 ms.
ADC sampling rate	6.25 MHz
Elev. beamwidth (3dB)	25.0 deg
Azim. beamwidth (3dB)	12.5 deg
Elev. pointing angle	15.0 deg (variable)

TABLE II
SPECIFICATIONS OF THE IMAR iNAV-RQH INS/GNSS SYSTEM

Positioning accuracy	2 cm, postproc. RTK/INS 0.6 nm/hr, free inertial
Attitude accuracy	0.002 deg, postproc. RTK/INS
True heading	0.005 deg postproc. RTK/INS
Velocity accuracy	< 2 mm/s postproc. RTK/INS
Gyro. type	3 ring-laser gyros (RLG)
Acc. type	3 servo accelerometers

prototype is a modified configuration of the Gamma Portable Radar Interferometer (GPRI-II) [4]. In Table II the specifications of the high-precision iMAR iNAV-RQH ring-laser gyro INS/GNSS navigation system are given. In Fig. 1 the updated car-borne measurement

setup is depicted with an aluminium rack hosting the radar transmit and receive horn antennas, the RFA unit of the Ku-band radar, and the INS/GNSS iNAV-RQH system with the GNSS antenna for high-precision positioning/attitude determination.

III. GPU-BASED TDBP PROCESSING

The SAR data is focused using a time-domain back-projection approach [5], [6] adapted to FMCW systems [7]–[9]. Also a graphics processing unit (GPU)-based parallelized implementation of a TDBP algorithm [5], [6] based on NVIDIA’s Compute Unified Device Architecture (CUDA) application programming interface had been implemented; a brief performance analysis of a first implementation was given in [8]. A refined efficient parallelized interpolation scheme and block processing is employed to achieve image-focusing times down to the order of 10-15 min for a raw data set of dimensions 3000-by-40000.

IV. RESULTS

In Fig. 2 a geocoded multi-look intensity (MLI) image of a car-borne SAR data acquisition taken on a road along a section of 285 m of length is shown. The radar sensor used is a modified configuration (as shown in Fig. 1) of the GPRI-II Ku-band FMCW radar [4] with motion data acquired by means of the high-precision iNAV-RQH INS/GNSS system, the specification of which is given in Table II. Although a high-precision INS/GNSS has been used for the experiment, the short wavelength of the prototype Ku-band system in combination with the rather long synthetic aperture integration time requires that autofocus techniques are

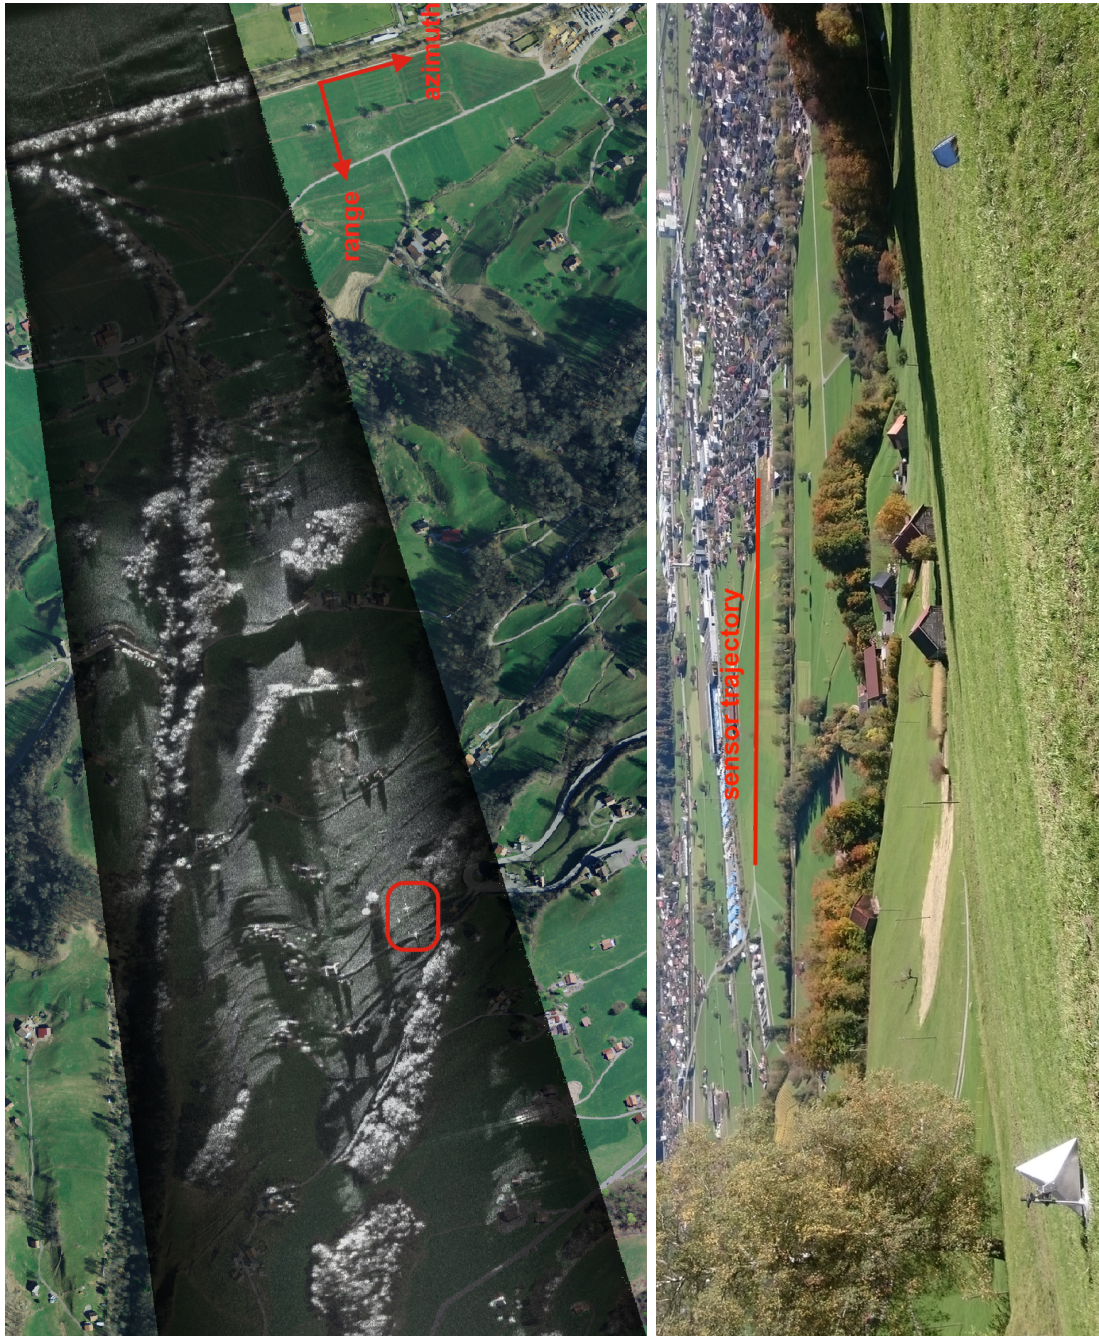


Fig. 2. Left: Geocoded multi-look intensity (MLI) image of a car-borne SAR data acquisition taken on a road along a section of 285 m of length. The range and azimuth direction as well as the region, where the corner reflectors were deployed, are indicated. Sensor: Modified GPRI-II Ku-band FMCW radar in car-borne configuration (Fig. 1). Processing: Time-domain Back-projection on a NVIDIA Tesla K20 GPU. The data set was focused directly to map coordinates using a DEM. The MLI image is blended with a high-resolution (25cm) orthophoto (Orthophoto: swissimage 25cm©swisstopo). Right: View from the reflector location on the hillside down to the valley floor where the car was driven along a road to acquire the SAR data set. The sensor trajectory of the car-borne SAR is indicated with a red line.

applied to mitigate unknown residual motion errors. In Fig. 3 an impulse response plot is shown as obtained from one of the corner reflectors deployed in the field. The 3 dB resolutions in range and azimuth are about 1.8m (at a reduced bandwidth of 100MHz plus a tapering

window) and about 10cm, respectively. The high resolution in azimuth is due to the relatively small extension of the Ku-band horn antennas used in this experiment. Thus, substantial multilooking can be applied in azimuth while keeping the range resolution at an acceptable level.

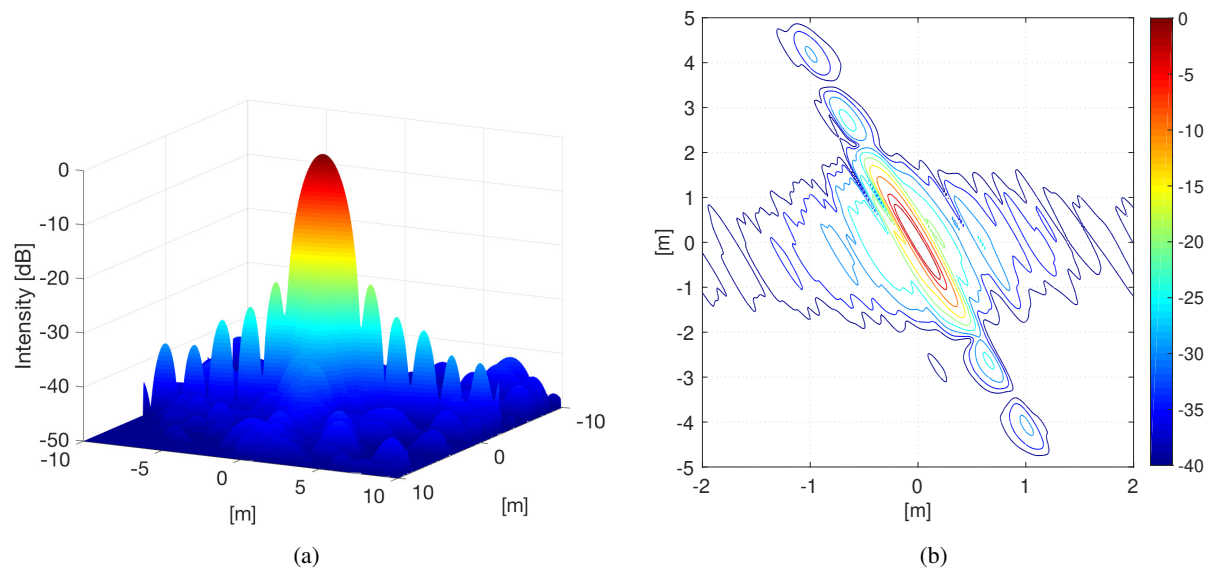


Fig. 3. Impulse response function (IRF) of a trihedral corner reflector deployed in the field. Since, in this case, the image data grid is directly in map coordinates the IRF is slightly rotated. Note the rather different 3 dB resolutions of roughly 1.8m in range (obtained with 100MHz bandwidth and a tapering window) and about 10cm in azimuth, respectively.

V. CONCLUSION

An overview of the current development status of an experimental car-borne SAR system was given including high-resolution focused SAR data obtained with the current prototype Ku-band radar setup. Performance indicators for the resolution and focusing characteristics of the radar and processing system, using a GPU-based TDBP approach, were shown based on an impulse response as obtained from a corner reflector placed in the field. The focus of further developments is on testing the repeat-pass InSAR capability of the car-borne SAR system using a newly developed L-band FMCW radar. In addition, further investigations regarding potential improvements in the measurement and positioning setup are envisaged in view of the targeted repeat-pass interferometric applications.

ACKNOWLEDGMENT

This joint academic-industry research project is partially funded by the Swiss Commission of Technology and Innovation CTI / Innosuisse.

REFERENCES

- [1] O. Monserrat, M. Crosetto, and G. Luzi, "A review of ground-based SAR interferometry for deformation measurement," *ISPRS Journal of Photogrammetry and Remote Sensing*, vol. 93, pp. 40–48, 2014.
- [2] R. Caduff, F. Schlunegger, A. Kos, and A. Wiesmann, "A review of terrestrial radar interferometry for measuring surface change in the geosciences," *Earth Surface Processes and Landforms*, vol. 40, no. 2, pp. 208–228, 2015.
- [3] O. Frey, C. L. Werner, U. Wegmuller, A. Wiesmann, D. Henke, and C. Magnard, "A car-borne SAR and InSAR experiment," in *Proc. IEEE Int. Geosci. Remote Sens. Symp.*, 2013, pp. 93–96.
- [4] C. L. Werner, A. Wiesmann, T. Strozzi, A. Kos, R. Caduff, and U. Wegmuller, "The GPRI multi-mode differential interferometric radar for ground-based observations," in *Proc. EUSAR 2012 - 9th European Conference on Synthetic Aperture Radar*, Apr. 2012, pp. 304–307.
- [5] O. Frey, C. Magnard, M. Rüegg, and E. Meier, "Focusing of airborne synthetic aperture radar data from highly nonlinear flight tracks," *IEEE Trans. Geosci. Remote Sens.*, vol. 47, no. 6, pp. 1844–1858, June 2009.
- [6] O. Frey, E. Meier, and D. Nüesch, "Processing SAR data of rugged terrain by time-domain back-projection," in *SPIE Vol. 5980: SAR Image Analysis, Modeling, and Techniques X*, 2005.
- [7] A. Ribalta, "Time-domain reconstruction algorithms for FMCW-SAR," *IEEE Geoscience and Remote Sensing Letters*, vol. 8, no. 3, pp. 396–400, May 2011.
- [8] O. Frey, C. L. Werner, and U. Wegmuller, "GPU-based parallelized time-domain back-projection processing for agile SAR platforms," in *Proc. IEEE Int. Geosci. Remote Sens. Symp.*, July 2014, pp. 1132–1135.
- [9] C. Stringham and D. G. Long, "GPU processing for UAS-based LFM-CW stripmap SAR," *Photogrammetric Engineering & Remote Sensing*, vol. 80, no. 12, pp. 1107–1115, 2014.